


Installation Guide

Double Roller Blinds


Before you begin

The front blind should be the one highest and closest to you, so make sure that when marking out where to put your brackets you have one round section pointing toward you and the other pointing down.



Fitting the brackets

The brackets offer three methods of installation:




Top-Fixing

Where the brackets are screwed into the lintel (or 'ceiling' of the recess)



Face-Fixing


Where the brackets are (a wall or window frame)



Side-Fixing

Where the brackets are screwed onto a facing surface screwed into the side walls of the recess






For safety reasons, always ensure that the top of the blind is installed at least 150cm (1500mm) from the floor.



Installation Guide

Double Roller Blinds

Fitting the blind

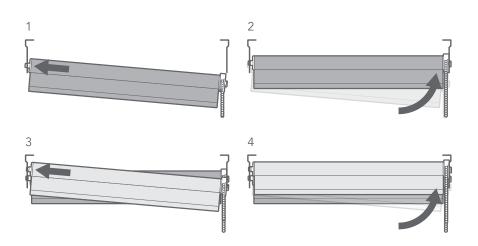


Install the rear blind first. Begin by slotting the 'pin' end into the circular hole in the bottom part of the bracket.

Lift the 'control' end and slot it up into the notches on its bracket, then push down on it gently to ensure it's fixed in securely.

Repeat the process for the front blind.

Cord Tensioner

Child Safety

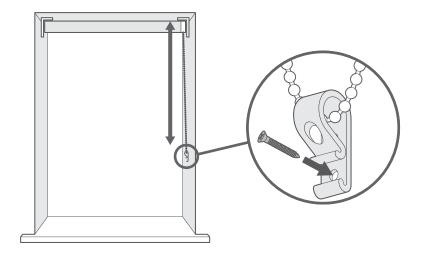

The cord retaining device must be installed at the maximum distance possible from the control mechanism to prevent looped cords from becoming slack.

Place the retaining device on the wall and mark the position of the screw hole(s) with a pencil.

Attach the retaining device to the wall using the fixings provided.



Young children can be strangled by loops in pull cords, chains, tapes and inner cords that operate the product.

To avoid strangulation and entanglement, keep cords out of the reach of young children. Cords may become wrapped around a child's neck.

Move beds, cots and furniture away from window covering cords.

Do not tie cords together. Make sure cords do not twist and create a loop.